


Alimentación: AC100-240 V Frecuencia: 50/60 Hz LED: COB PF: >0,9 Ángulo: 120° Vida: 35000 h CRI: >70 Ra Temperatura: -20°+50°C (-40°+60°C)

PROYECTOR LED 10W




REFERENCIA	POTENCIA	COLOR	COLOR LUZ	FLUJO LUMINOSO	MEDIDAS/mm.	PESO/kg.
510100NW	10 W	Negro	4000-4500K	700 Lm	156 x 108 x 42	0,616
510101NW	10 W	Gris	4000-4500K	700 Lm	156 x 108 x 42	0,616
510100CW	10 W	Negro	6000-6500K	750 Lm	156 x 108 x 42	0,616
510101CW	10 W	Gris	6000-6500K	750 Lm	156 x 108 x 42	0,616

Dimensiones



Radiación

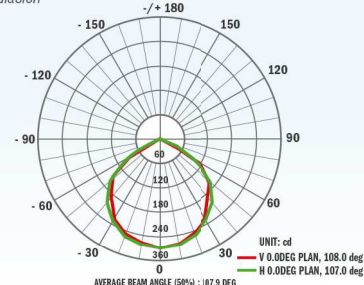


PROYECTOR LED 20W




REFERENCIA	POTENCIA	COLOR	COLOR LUZ	FLUJO LUMINOSO	MEDIDAS/mm.	PESO/Kg.
510200NW	20 W	Negro	4000-4500K	1400 Lm	205 x 145 x 51,5	1,046
510201NW	20 W	Gris	4000-4500K	1400 Lm	205 x 145 x 51,5	1,046
510200CW	20 W	Negro	6000-6500K	1500 Lm	205 x 145 x 51,5	1,046
510201CW	20 W	Gris	6000-6500K	1500 Lm	205 x 145 x 51,5	1,046

Dimensiones



Radiación

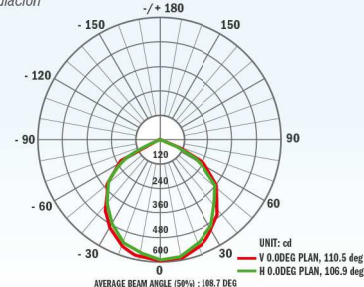


PROYECTOR LED 30W




REFERENCIA	POTENCIA	COLOR	COLOR LUZ	FLUJO LUMINOSO	MEDIDAS/mm.	PESO/kg.
510300NW	30 W	Negro	4000-4500K	2100 Lm	258 x 200 x 57,5	1,636
510301NW	30 W	Gris	4000-4500K	2100 Lm	258 x 200 x 57,5	1,636
510300CW	30 W	Negro	6000-6500K	2250 Lm	258 x 200 x 57,5	1,636
510301CW	30 W	Gris	6000-6500K	2250 Lm	258 x 200 x 57,5	1,636

Dimensiones



Radiación

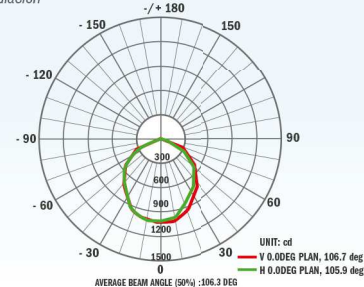


PROYECTOR LED 50W




REFERENCIA	POTENCIA	COLOR	COLOR LUZ	FLUJO LUMINOSO	MEDIDAS/mm.	PESO/kg.
510500NW	50 W	Negro	4000-4500K	3500 Lm	309 x 245 x 69	2,492
510501NW	50 W	Gris	4000-4500K	3500 Lm	309 x 245 x 69	2,492
510500CW	50 W	Negro	6000-6500K	3750 Lm	309 x 245 x 69	2,492
510501CW	50 W	Gris	6000-6500K	3750 Lm	309 x 245 x 69	2,492

Dimensiones



Radiación

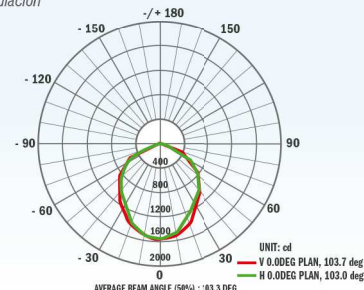


Alimentación: AC100-240 V
Frecuencia: 50/60 Hz
LED: COB
PF: >0,9
Ángulo: 120°
Vida: 35000 h
CRI: >70 Ra
Temperatura: -20°+50°C (-40°+60°C)

PROYECTOR LED 70W




REFERENCIA	POTENCIA	COLOR	COLOR LUZ	FLUJO LUMINOSO	MEDIDAS/mm.	PESO/kg.
510700NW	70 W	Negro	4000-4500K	5250 Lm	359 x 252,5 x 87,5	4,100
510701NW	70 W	Gris	4000-4500K	5250 Lm	359 x 252,5 x 87,5	4,100
510700CW	70 W	Negro	6000-6500K	5600 Lm	359 x 252,5 x 87,5	4,100
510701CW	70 W	Gris	6000-6500K	5600 Lm	359 x 252,5 x 87,5	4,100

Dimensiones



Radiación

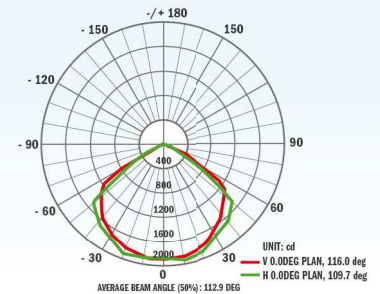


PROYECTOR LED 100W




REFERENCIA	POTENCIA	COLOR	COLOR LUZ	FLUJO LUMINOSO	MEDIDAS/mm.	PESO/kg.
5101001CW	100 W	Gris	6000-6500K	8000 Lm	438 x 286 x 97	5,600
5101000CW	100 W	Negro	6000-6500K	8000 Lm	438 x 286 x 97	5,600

Dimensiones

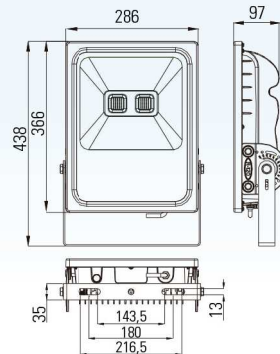

Radiación

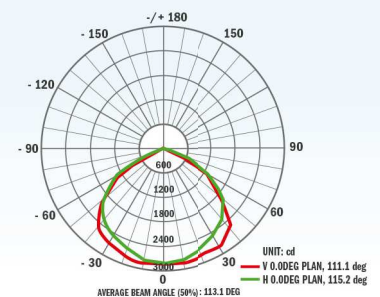


PROYECTOR LED 120W




REFERENCIA	POTENCIA	COLOR	COLOR LUZ	FLUJO LUMINOSO	MEDIDAS/mm.	PESO/kg.
5101201CW	120 W	Gris	6000-6500K	9600 Lm	438 x 286 x 97	5,600
5101200CW	120 W	Negro	6000-6500K	9600 Lm	438 x 286 x 97	5,600

Dimensiones

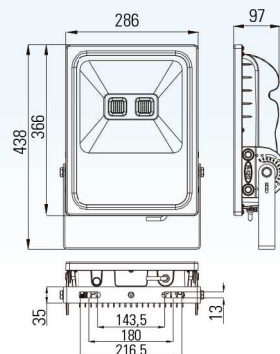


Radiación

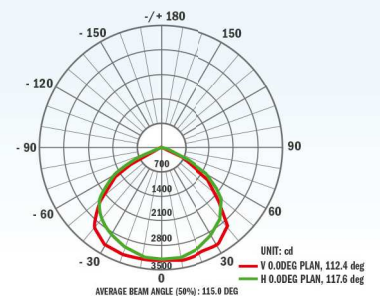

Alimentación: AC100-240 V Frecuencia: 50/60 Hz LED: COB PF: >0,9 Ángulo: 60°/90°/120° Vida: >35000 h CRI: >70 Ra Temperatura: -20°+50°C (-40°+60°C)

CAMPANA LED 100W



REFERENCIA	POTENCIA	COLOR	COLOR LUZ	FLUJO LUMINOSO	MEDIDAS/mm.	PESO/kg.
52010060CW	100 W	Plata	6000-6500K	7500 Lm	610x420x250	5,928
52010090CW	100 W	Plata	6000-6500K	7750 Lm	530x488x185	5,928
520100120CW	100 W	Plata	6000-6500K	8000 Lm	495x488x138	5,928

Reflector 60°






Reflector 90°






Reflector 120°



Dimensiones



Radiación

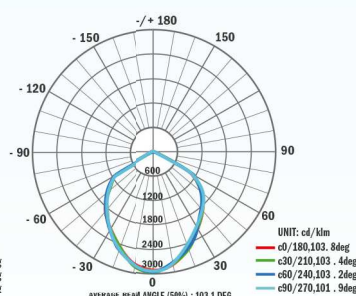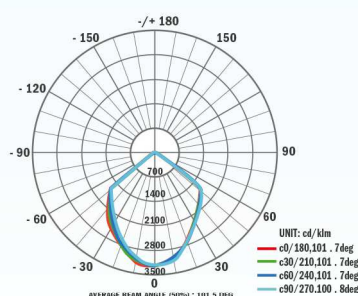


Alimentación: AC100-240 V Frecuencia: 50/60 Hz LED: SMD 3030 PF: >0,9 Ángulo: 60°/90°/120° Vida: >35000 h CRI: >70 Ra Temperatura: -20°+50°C (-40°+60°C)

CAMPANA LED 150W




REFERENCIA	POTENCIA	COLOR	COLOR LUZ	FLUJO LUMINOSO	MEDIDAS/mm.	PESO/kg.
52015050CW	150 W	Plata	6000-6500K	11750 Lm	534 x 445 x 200	4,300
52015080CW	150 W	Plata	6000-6500K	12250 Lm	492 x 445 x 158	4,300
520150110CW	150 W	Plata	6000-6500K	12750 Lm	434 x 445 x 100	4,300

Reflector 50°



Reflector 80°



Reflector 110°

